




51C

Full circle
Standard break

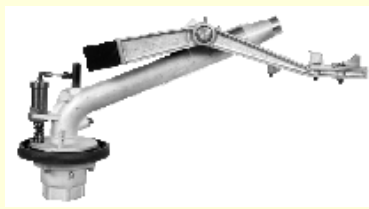

51CH

Full circle
Hydraulic break



51S

Part circle
Standard break



51SH

Part circle
Hydraulic break

FEATURES

- Aluminium body and nozzles.
- 2" female thread inlet
- Trajectory angle: 24°
- Nozzle from Ø14 or 26 mm
- Discharge from 15 to 73 m³/h
- Radius from 33 to 58 meters
- Working pressure: 4.0 to 8.0 bars
- Quick return on part circle system
- Packaging: box of 1 unit

USE

- Overhead irrigation for agricultural crop.
- Landscape and football pitch irrigation
- Dust suppression system.
- Horse racing fields.

HOW TO FIT**

- Put Teflon between rain gun and base
- Riser must be rigid.

** Installations and specifications done in the area are made under the responsibility of the installer according to the area Rules and Authorities.

51 Full and part circle

Nozzle size (mm)	Pressure (bar)	Discharge* (m ³ /h)	Radius* (m)
14	4.0	15.0	33
	5.0	16.5	34
	6.0	18.2	36
16	4.0	19.5	37
	5.0	21.5	40
	6.0	24.0	41
	7.0	26.0	42
18	4.0	25.0	40
	5.0	27.5	42
	6.0	30.0	44
	7.0	32.0	46
20	5.0	34.5	45
	6.0	37.8	47
	7.0	41.0	49
22	5.0	41.5	47
	6.0	45.0	50
	7.0	59.0	53
24	6.0	54.0	52
	7.0	58.0	55
	8.0	62.0	57
26	6.0	63.0	55
	7.0	68.0	56
	8.0	73.0	58

* To be used for informational purpose only.