




**51C**

Full circle  
Standard break

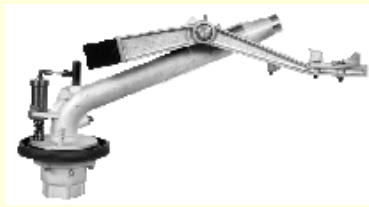

**51CH**

Full circle  
Hydraulic break



**51S**

Part circle  
Standard break



**51SH**

Part circle  
Hydraulic break

## FEATURES

- Aluminium body and nozzles.
- 2" female thread inlet
- Trajectory angle: 24°
- Nozzle from Ø14 or 26 mm
- Discharge from 15 to 73 m<sup>3</sup>/h
- Radius from 33 to 58 meters
- Working pressure: 4.0 to 8.0 bars
- Quick return on part circle system
- Packaging: box of 1 unit

## USE

- Overhead irrigation for agricultural crop.
- Landscape and football pitch irrigation
- Dust suppression system.
- Horse racing fields.

## HOW TO FIT\*\*

- Put Teflon between rain gun and base
- Riser must be rigid.

\*\* Installations and specifications done in the area are made under the responsibility of the installer according to the area Rules and Authorities.

## 51 Full and part circle

Nozzle size (mm)	Pressure (bar)	Discharge* (m <sup>3</sup> /h)	Radius* (m)
14	4.0	15.0	33
	5.0	16.5	34
	6.0	18.2	36
16	4.0	19.5	37
	5.0	21.5	40
	6.0	24.0	41
	7.0	26.0	42
18	4.0	25.0	40
	5.0	27.5	42
	6.0	30.0	44
	7.0	32.0	46
20	5.0	34.5	45
	6.0	37.8	47
	7.0	41.0	49
22	5.0	41.5	47
	6.0	45.0	50
	7.0	59.0	53
24	6.0	54.0	52
	7.0	58.0	55
	8.0	62.0	57
26	6.0	63.0	55
	7.0	68.0	56
	8.0	73.0	58

\* To be used for informational purpose only.