


6

Under tree irrigation Low discharge

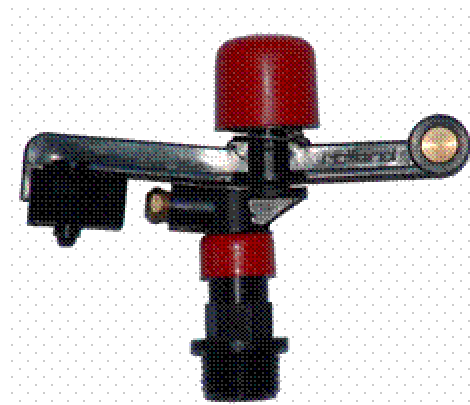

FEATURES

- 1/2" male threaded inlet
- Trajectory angle: 4° or 14°
- Front nozzle from Ø1.5 to 2.5 mm
- Discharge from 0.12 to 0.39 m³/h
- Radius from 5.8 to 9.0 meters
- Working pressure: 2.5 to 3.5 bars

USE

- Under tree irrigation.
- For orchards

SPECIALITIES

- Impact sprinkler.
- Large choice of nozzles (4°, 14°, standard or key).
- Can be used with simplified filtration system.
- Easy to use.

HOW TO FIT**

- Put Teflon on the sprinkler base (do not put it on springs)
- Check that the sprinkler base does not touch the inner part of the connector that will block rotation.
- Spacing between sprinkler maxi 12 metres (14°)
- One line spacing maxi 12 metres (14°)
- To install on Stake P6 or P10 or saddle tee.
- Use low density PE pipe or drip pipe with P6 or P10

** Installations and specifications done in the area are made under the responsibility of the installer according to the area Rules and Authorities.


Nozzle diameter (mm)	Pressure (bar)	Discharge* (l/h)	Radius (m) Nozzle 4°	Radius(m) Nozzle 14°
1.5	2.5	118	5.8	-
	3.0	130	6.0	-
	3.5	138	6.1	-
2.0	2.5	220	6.3	8.6
	3.0	232	6.4	8.8
	3.5	248	6.5	8.9
2.5	2.5	326	6.6	8.7
	3.0	358	6.7	9.0
	3.5	386	6.8	9.0

* To be used for informational purpose only.

Others available nozzles : see page 2

6

Under tree irrigation
Low discharge

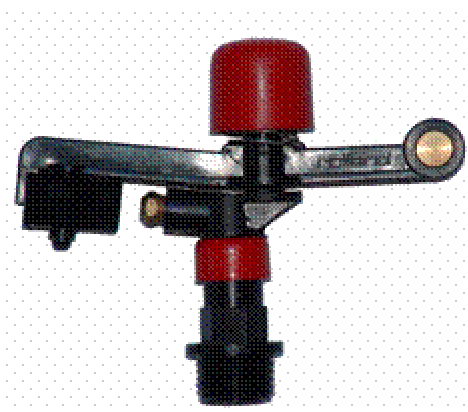

Others available nozzles :

Nozzle diameter (mm)	Pressure (bar)	Discharge* (l/h)	Radius (m) Nozzle 4°	Radius(m) Nozzle 14°
1.8	2.5	175	6.0	
	3.0	200	6.1	
	3.5	225	6.2	
1.8F (key nozzle)	2.5	330	4.7	
	3.0	350	4.9	
	3.5	370	5.0	
2F (key nozzle)	2.5	340	5.2	
	3.0	370	5.4	
	3.5	400	5.8	
2.5F (key nozzle)	2.5	420	6.0	
	3.0	480	6.3	
	3.5	540	6.5	
1.5AH	2.5	118		7.4
	3.0	130		7.5
	3.5	138		7.6
1.8AH	2.5	175		6.0
	3.0	200		6.2
	3.5	225		6.3
2AH	2.5	220		8.6
	3.0	232		8.8
	3.5	248		8.9
2.2AH	2.5	290		6.6
	3.0	320		6.7
	3.5	350		7.0
2.5AH	2.5	326		8.7
	3.0	358		9.0
	3.5	386		9.0
2.8AH	2.5	410		8.2
	3.0	430		8.4
	3.5	450		8.8
3AH	2.5	350		6.8
	3.0	380		7.0
	3.5	410		7.2
1.8AHF (key nozzle)	2.5	220		6.1
	3.0	250		6.4
	3.5	280		6.6
2AHF (key nozzle)	2.5	320		7.2
	3.0	350		7.3
	3.5	380		7.5
2.2AHF (key nozzle)	2.5	330		7.4
	3.0	360		7.5
	3.5	390		7.7
2.5AHF (key nozzle)	2.5	440		7.7
	3.0	470		8.3
	3.5	500		8.5