


## 7

### Under tree irrigation

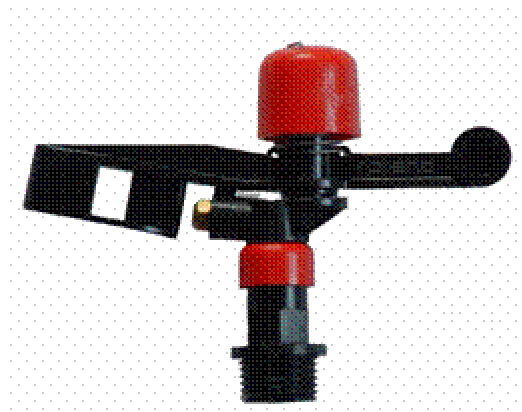

#### FEATURES

- 1/2" male threaded inlet
- Trajectory angle: 4° or 14°
- Front nozzle from Ø2.5 to 3.2 mm
- Discharge from 0.29 to 0.64 m³/h
- Radius from 6.8 to 9.7 meters
- Working pressure: 2.5 to 3.5 bars

#### USE

- Under tree irrigation.
- For orchards

#### SPECIALITIES

- Impact sprinkler.
- Large choice of nozzles (4°, 14°, standard or key ).
- Can be used with simplified filtration system.
- Easy to use.

Nozzle diameter (mm)	Pressure (bar)	Discharge* (l/h)	Radius (m) Nozzle 4°	Radius(m) Nozzle 14°
2.5	2.0	290	6.8	7.8
	2.5	326	7.6	8.3
	3.0	358	8.0	9.0
2.8	2.5	396	-	8.5
	3.0	406	-	9.0
	3.5	415	-	9.3
3.0	2.5	420	-	8.7
	3.0	426	-	9.1
	3.5	475	-	9.4
3.2	2.5	498	-	9.0
	3.0	560	-	9.4
	3.5	640	-	9.7

Also exist :  
Key nozzle : Ø2.5  
14° key nozzle: Ø2.5

\* To be used for informational purpose only.

#### HOW TO FIT\*\*

- Put Teflon on the sprinkler base (do not put it on springs)
- Check that the sprinkler base does not touch the inner part of the connector that will block rotation.
- Spacing between sprinkler maxi 12 metres (14°)
- One line spacing maxi 12 metres (14°)
- To install on Stake P6 or P10 or saddle tee with rigid pipe.
- Use low density PE pipe or drip pipe with P6 or P10

\*\* Installations and specifications done in the area are made under the responsibility of the installer according to the area Rules and Authorities.